



Eco Lift 2.35

TECHNICAL DATA

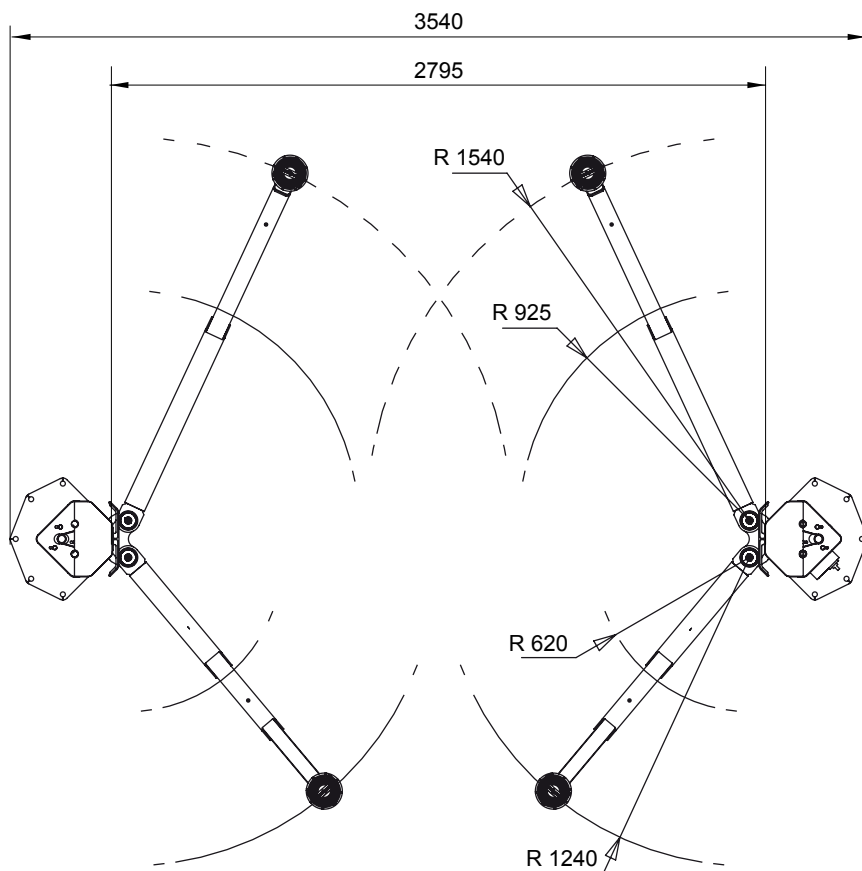

ACCESSORIES


Flip-flap support
102219

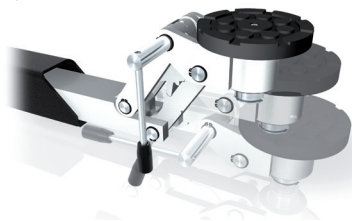

Energy set
102226




Door protection
104489

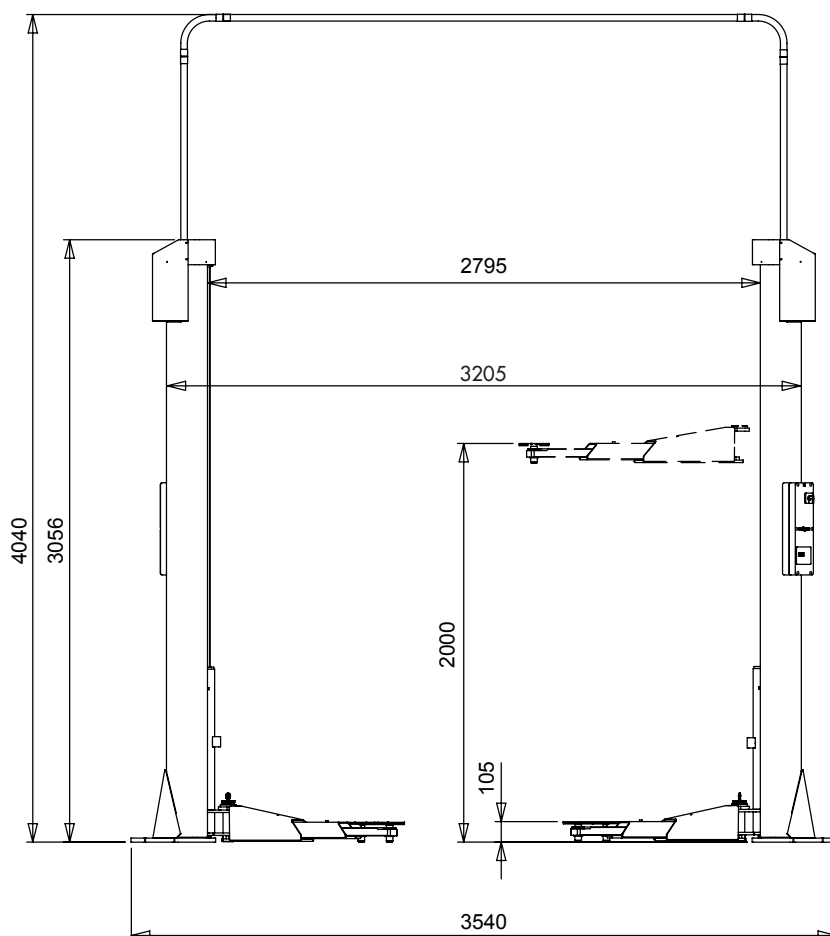

Eco Lift 2.35



- electronic control with end switches and permanent monitoring of safety functions
- acoustic and optic error display
- permanent monitoring of support nut and automatic switch off in case of maximum permitted wear
- automatic switch off in case of lowering on to an obstacle
- acoustic signal instead of feet protectors
- plastic mounted swivel arms
- automatic and manual support arm locking

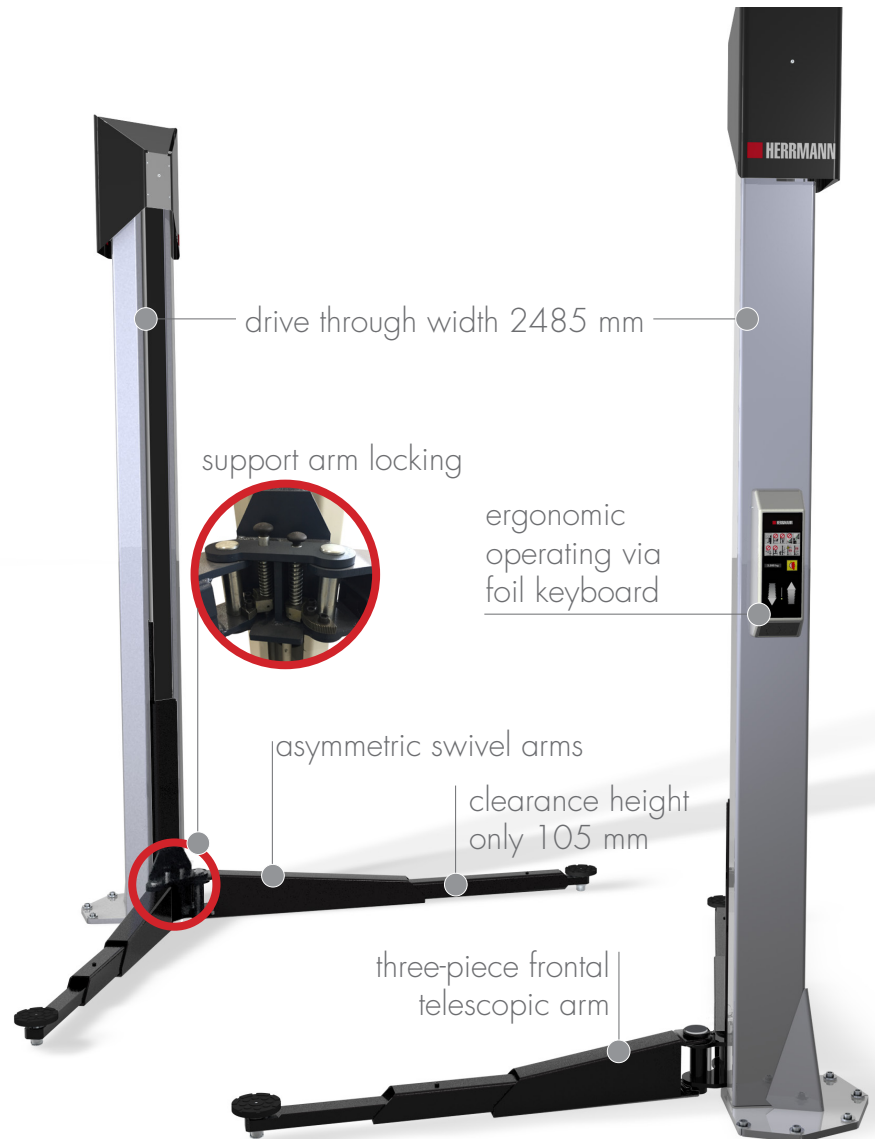

TECHNICAL DATA

capacity	3500 kg	Eco Lift 2.35
column height	3056 mm	108672
total width column-column outside	3540 mm	Flip-flap support for Eco Lift 2.35 (4 pc.)
total width column-column inside	2795 mm	102219
clearance between suport arms	2485 mm	Energy set 230V / Compressed air
lifting height	2000 mm	102226
lifting time	45 sec.	2nd operating control for slave column
swivel arm short three-piece	620-1240 mm	102227
swivel arm long two-piece	925-1540 mm	Stacking adapter extension
adjustable area stacking adapter	105-160 mm	ø 45 x 80 mm
motor output	2 x 2,4 kW	102284
power connector	400 V, 16 A	Stacking adapter extension
total weight	530 kg	ø 45 x 130 mm
		102287

Protection of patterns and designs for column, lifting wagon, support arm locking, electronical length-measuring system

Herrmann AG
Bahnhofstrasse 32
D-93483 Pöding

Sales

Phone: +49 (0)9461/91388 50
Fax: +49 (0)9461/91388 33
E-Mail: sales@herrmann.de

Service

Phone: +49 (0)9461/91388 31
Fax: +49 (0)9461/91388 33
E-Mail: service@herrmann.de

www.herrmann.de